

Q345A Igniter-Sensor

Nonprimary-aerated combination pilot burner and igniter. Used with the S86, S860, S8610 or S8670 in intermittent pilot systems.

- Includes pilot burner with bracket, ceramic-insulated Kanthal flame rod/spark igniter, and ground strap.


TEMPERATURE RATINGS:

At electrode tip—1775 F (968 C) max.




At ceramic insulator—1250 F (677 C) max.

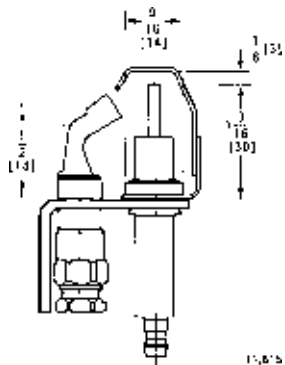

Mounting dimensions in in. (mm) and bracket type for Q345A.



*TRADELINÉ models.

Order Number	Tip Style	Type of Gas	Mounting Bracket	Includes
*Q345A1305		Nat.	B	¼ in. cc inlet fitting and mounting adaptor.
*Q345A1313		Nat.	B	
*Q345A1321		Nat.	B	